


HARDWARE DESCRIPTION		QTY.
HWKT-03054X		QIT.
FLBW- 00894X	M8-1.25 X 30MM CLASS 8.8	
	FLANGE CAP SCREW	12
	W/WASHER	

PARTS INCLUDED	QTY
Driver Side	1
Passenger side	1

## DO NOT USE IMPACT TOOLS




**<u>Step 1</u>**: Locate the driver side step rail.

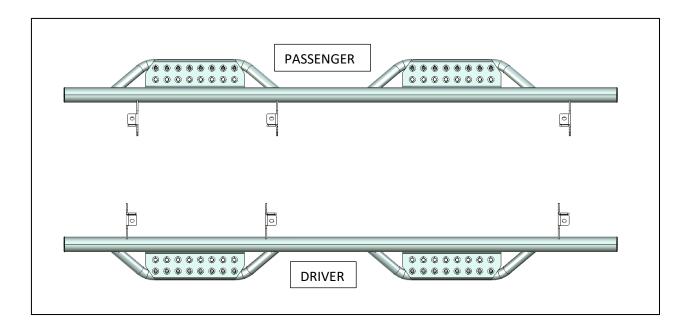

<u>Step 2</u> Carefully raise the Nerf Step up into position aligning the mounting brackets with the factory-threaded holes. Beginning with the center bracket start one of the supplied M8x30mm Hex bolts in the upper mount and finger tighten. This will allow the Nerf step to be suspended while you start the reminder of the hardware.

<u>Step 3</u> Next, start all remainder hardware in the factory locations and leave loose.



<u>Step 4</u> After final adjustment tighten the lower mounts first then the upper mounts. <u>Step 5:</u> Repeat steps 2-4 for the passenger side.

